



J2 TRACK

120V Double Circuit Track System

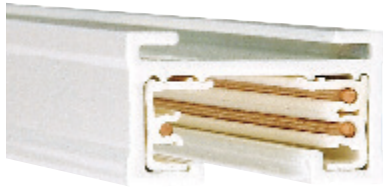

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Designed for nearly every application and interior environment, our extensive 120V Track collection offers hundreds of luminaires that integrate cutting edge design and aerospace detailing with designer glass and metal finishes. Versatile yet sturdy, the track systems can be surface mounted or suspended from the ceiling, liberating luminaires from the constraints of rigid mountings and enabling the lighting design to adapt to changing styles and spaces. 120V 3-wire, 2-circuit track saves on installation costs by eliminating the need for long separate feed runs.

FEATURES

- Each Circuit is rated at 20A and allows the control of two individual sets of fixtures
- Enables the use of two separately switched circuits on one section or run of track
- Compatible with all JHT and JTK series track luminaires
- Saves on installation costs by eliminating the need for long separate feed runs

SPECIFICATIONS

Materials: Aluminum extrusion with copper bus wire.

Electrical: 20 Amps rated, 120V. It is common practice to use tracks at 80% capacity to insure compatibility with dimmers and connectors (1920W maximum).

Mounting: Can be installed on drywall, or suspended ceilings.

Dimming: *Not recommended for dimming on both circuits. If two circuit dimming is required – please use W track as alternate*

Standards: UL & CUL listed

Selecting Connectors (example using J2 Track)



In order to select the appropriate connectors to maintain electrical continuity, start at your power source and walk the length of the track. If you turn left, use a left connector. If you turn right, use a right connector.

Polarity is just a matter of matching ends


The 2 wire side of a "J2" Track has an indicator groove running its length

- Using a left connector, the track would run with the groove along the outside

- Using a right connector, the track would run with the groove along the inside



■ = Electrical Continuity




ORDER NUMBER

Model	Length	Finish
J2 J2 Track	T4 4'	BK Black
	T8 8'	WT White

Each section includes two matching end caps.



Example: **J2-T8-WT**




J CLIP	Model	Description
2-Circuit Track Conversion Clip	JCLIP	Each 4' section includes 3 Each 8' section includes 6

Locks connectors on luminaire into 2-circuit mode

Sample Layout

A	J2-SKCF96	96" Track cable suspension with feed canopy, junction box shown in sample by others
B	J2-LE	Live end connector
C	J2-T4	4 foot section of J2 track
D	SKC96	Track cable suspension
E	J2-LLEFT	"J2" Connector (left)
F	J-7011	Ocularc 7011 track head
G	J-ENDCAP	End Cap (included with track section)

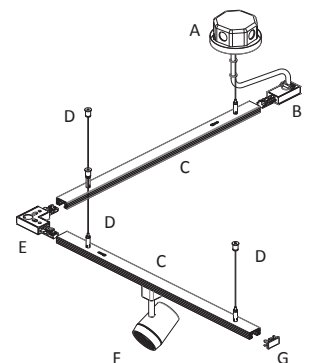

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters, East Manufacturing Facility

44 Harbor Park Drive

Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct

Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway, Ste 100

Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave











Ontario, CA 91761

J2 TRACK

120V Double Circuit Track System



Track Suspension

	Model	Length	Finish
<i>All Track Suspension Kit</i> 	SK	18 18" 36 36"	BK
		24 24" 48 48"	WT
<i>Suspension Kit Extender</i> 	R	18 18"	BK
		24 24"	WT
		36 36"	WT
<i>Sloped Ceiling Adapter</i> 	SK14		BK WT
<i>Rod Coupler</i> 	RI		BK WT
<i>Suspension Adjustment Collar Kit</i> 	SK05	Includes two collars	BK WT
<i>Track Cable Suspension</i> 	SKC	96 96"	NI
<i>Track Feed Canopy with Cable Suspension</i> 	J2-SKCF	96 96"	BK WT
<i>Low Voltage Track Head Extension</i> 	X	6 6"	BK
		12 12"	WT
		18 18"	WT
<i>Wall Mount Suspension Bracket</i> 	TBKT	18"	BK WT
<i>Wire Way Cover</i> 	J2-WCOV		BK WT















Fixture Type:

Catalog Number:

Project:

Location:

Accessories

	Model	Finish	Dimensions
<i>Live End Connector</i> 	J2-LE	BK WT	4 3/4" x 1 1/4" x 3/4"
<i>Live End BX Connector</i> 	J2-BXLE	BK WT	5 7/8" x 1 3/8" x 1 1/4"
<i>1" Power Connector</i> 	J2-IPWR	BK WT	7" x 1 3/8" x 3/4"
<i>1" Connector - Left</i> 	J2-LLEFT	BK WT	4 1/4" x 4 1/4" x 3/4"
<i>1" Connector - Right</i> 	J2-LRIGHT		
<i>T" Connector</i> 	J2-T	BK WT	7" x 4 1/4" x 3/4"
<i>X" Connector</i> 	J2-X	BK WT	7" x 7" x 3/4"
<i>1" Connector</i> 	J2-I	BK WT	4 1/2" x 1 3/8" x 3/4"
<i>1" Dead End Connector</i> 	J2-IDEC	BK WT	3 1/2" x 3/8" x 3/4"
<i>Flexible Track Connector</i> 	J2-FLX	BK WT	11 1/2" x 1 3/8" x 3/4"
<i>T-Bar Drop Ceiling Attachment</i> 	T-BARCLIP		1 1/2" x 1 1/4"
<i>Octagon Box Cover</i> 	J2-UCP	BK WT	4 1/8" x 4 1/8"
<i>Trimless Junction Box Cover</i> 	CP-TL	WT	4 1/16" x 4 1/16"
<i>T-Bar End Feed</i> 	J2-TBLE	BK WT	4 1/8" x 4 1/8"

Example: J2-FLX-WT

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters, East Manufacturing Facility
44 Harbor Park Drive
Port Washington, NY 11050

South East Manufacturing Facility
1600 Distribution Ct
Lithia Springs, GA 30122

Central Manufacturing Facility
1700 South J Elmer Freeway, Ste 100
Cedar Hill, TX 75104

West Manufacturing Facility
1750 S Archibald Ave
Ontario, CA 91761