

INSTRUCTIONS:

Models:

Low Volt Wall Sconce

WS-MR61

WS-MS61

WS-GR61

WS-GS

CAUTION:

Always turn off power at fuse box prior to installation to prevent electrical shock.

For installation by a qualified electrician.

Install over a standard 4 inch junction box.

All wires must be contained in the junction box.

Overview: Wall sconces are designed to accept glass shades from the G600 series. Canopies come with self-contained electronic transformers that can generally be used with standard incandescent dimmer switches.


Fixture Installation:

1. Loosen the three canopy screws and separate the canopy from the base plate.
2. Remove a knock out from the base plate.
3. Support canopy and guide the black and white wires and from the transformer through the knock out in the base plate and into the Junction box.
4. Connect ground wire from junction box to the green grounding wire from the base plate.
5. Connect corresponding line volt wires from the junction box to transformer wires, with wire nuts (supplied). Tuck excess wire into the junction box.
6. Attach the base plate to the junction box using the slotted holes.
7. Position the canopy to the base plate, and tighten the three screws loosened


Installing Lamp & Shade:

1. Thread the adjustable collar on the socket shaft so that 17 mm protrudes from the bottom of the shade (see detailed diagram on right).
2. Use 12V 50W bi-pin Halogen lamp with G6.35 base (supplied).
3. Insert the lamp into the ceramic part of the socket. Screw on bulb shield.
4. The bottom of the socket is a "Quick Connect" type. It will mate with the quick connect fitting coming from the canopy.
5. Place the shade on the shoulder of the socket assembly, then screw the socket assembly down securing both the socket & shade.

Retain instructions for future reference.

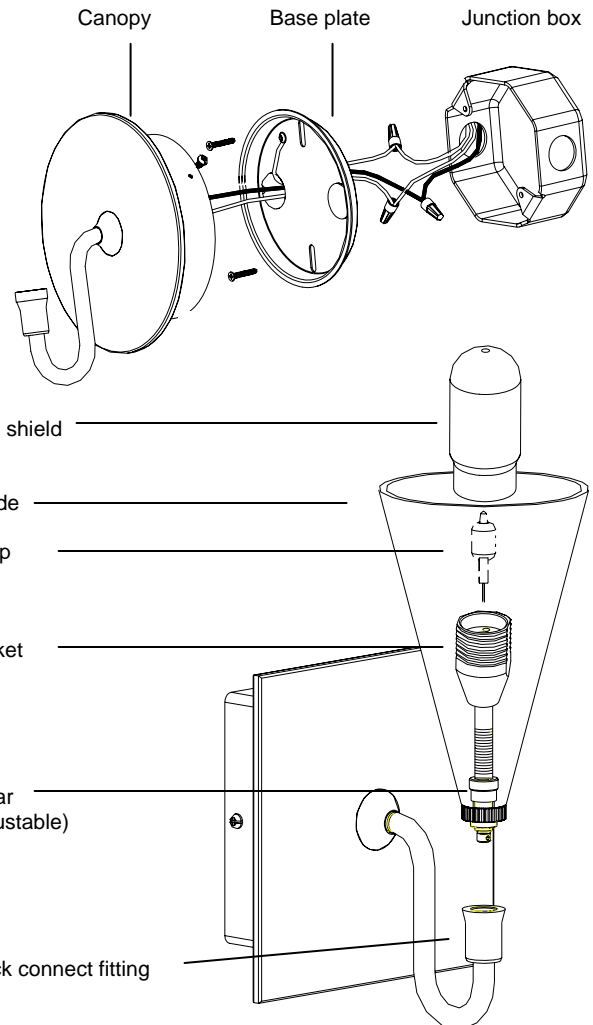

Socket & shade detail

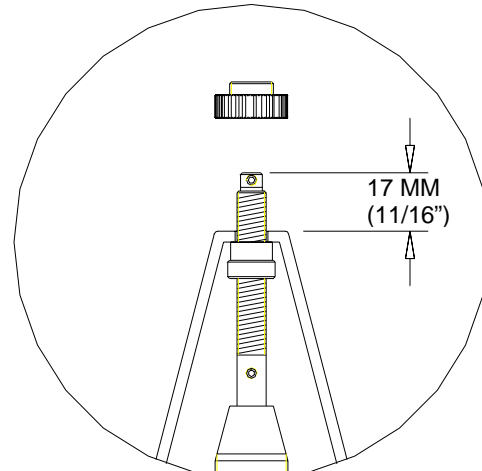

W • A • C | LIGHTING

www.waclighting.com

615 South Street, Garden City, NY 11530
Tel: (516) 515-5000 Fax: (516) 516-5050

168 Brea Canyon Road, City of Industry, CA 91789
Tel: (909) 468-1848 Fax: (909) 468-9958

11/16/04 Rev 2

9/19/03 REV 1