
SILO X10 - model: 2010

Monopoint Luminaire

WAC LIGHTING

Responsible Lighting®

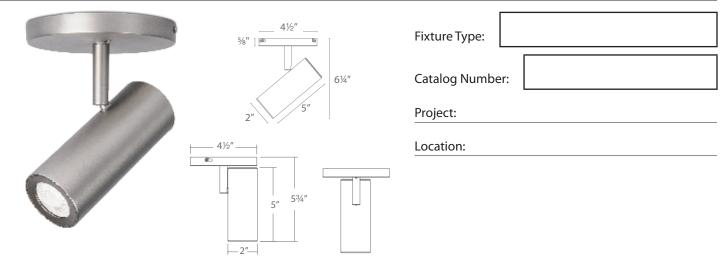

PRODUCT DESCRIPTION

Silo offers superior light output in a small, sleek design. Engineered synthesis of driver, single point source LED, optical and thermal management in a slender diecast housing. Ideal for residential, retail and lower mounting height commercial applications.

FEATURES SPECIFICATIONS

- 35° narrow flood optic installed. 25° spot optic included
- Ceiling and wall mountable
- Integral driver and high output COB LED
- Outperforms halogen 65W MR16
- · Accommodates one at lens accessory or one glare control accessory
- 350° horizontal and 90° vertical aiming
- 50,000 hour rated life
- 5 year WAC Lighting product warranty

Construction: Die-cast aluminum with removable front cap for lenses or

accessories

Input: 120-277V AC 50/60Hz

Power: 10W

Light Source: High output COB LED

Dimming: 100%-5% electronic low voltage (ELV) dimmer (120V only)

Finish: Powder coated Black and White **Anodized Brushed Nickel**

Standards: UL & cUL Damp Location listed

ORDER NUMBER

	Beam	Lumens	CBCP	Color	Temp	CRI	Finish	า
MO-2010	25° 35°	790 790	2575 1545	930	3000K	90	BN BK WT	Brushed Nickel Black White

MO-2010-930-

Example: MO-2010-930-BK

Accommodates one lens accessory or one glare control accessory

LENS ACCESSORIES

Amber Blue Green	LENS-11-AMB LENS-11-BLU LENS-11-GRN
Green	LENS-11-GKN
Red	LENS-11-RED
Frosted	LENS-11-FR
Spread	LENS-11-SPR
Beam Elongating	LENS-11-BEL

GLARE CONTROL ACCESSORIES

Cross Louver	LENS-11P-CRL	BN BK
Snoot	LENS-11-SNOOT	WT

EXTENSIONS Custom order as a complete unit. Ceiling mount only.

Х6	6"			<u> </u>
X12	12"		201	Extension
X18	18"	1400040000	BN	Exterision
X24	24"	MO2010930	BK	R
X36	36"		WT	5½"
X48	48"			

Example: X12-MO2010930WT