


CUBE ARCHITECTURAL DC-WS05-U

Ultra Narrow Beam LED Wall Mounts

WAC LIGHTING

Responsible Lighting®

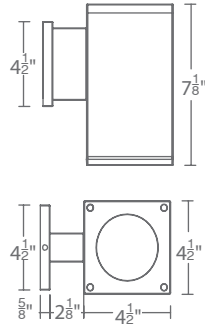

Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in ultra narrow beam precision optics. An appealing cubical profile perfect for accent lighting.

FEATURES


- High performance facade LED wall mount light
- Can be mounted upwards or downwards
- Solid aluminum construction
- 80,000 hour rated life
- 5 year warranty

SPECIFICATIONS



Input: 120V - 277VAC 50/60Hz
Dimming: 0 - 10V Dimming: 100% - 20%
 ELV 100% - 10% (120V only)
Standards: IP65 rated, UL & cUL wet location listed
Operating Temp: -40°C to 40°C

PHOTOMETRY

Reads 0.2 footcandle at 15 feet distance

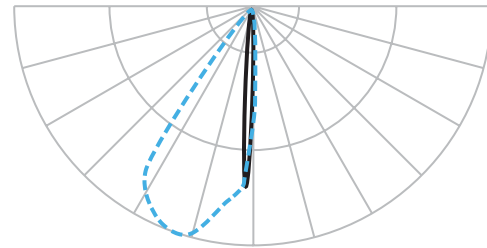

ORDERING NUMBER

Distribution	Diameter	Watt	Beam	Color Temp	CRI	Lumens	CBCP	Light Direction	Finish						
Single	DC-WS	05	5"	11W	U	6°	827	2700K	85	125	1182	B	Towards the wall		BK Black WT White BZ Bronze GH Graphite 
							830	3000K	85	145	1363				
							835	3500K	85	150	1411				
							840	4000K	85	155	1462				

DC-WS05-U ___ B-___

Example: DC-WS05-U830B-WT

wacighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122



Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

CUBE ARCHITECTURAL DC-WD05-U

Ultra Narrow Beam LED Wall Mounts

WAC LIGHTING

Responsible Lighting®

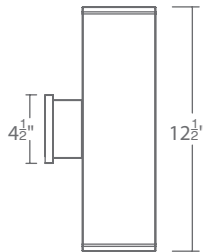

Fixture Type:

Catalog Number:

Project: _____


Location: _____

SPECIFICATIONS

Input:	120V - 277VAC 50/60Hz
Dimming:	0 - 10V Dimming: 100% - 20% ELV 100% - 10% (120V only)
Standards:	IP65 rated, UL & cUL wet location listed
Operating Temp:	-40°C to 40°C

PHOTOMETRY

Reads 0.2 footcandle at 15 feet distance

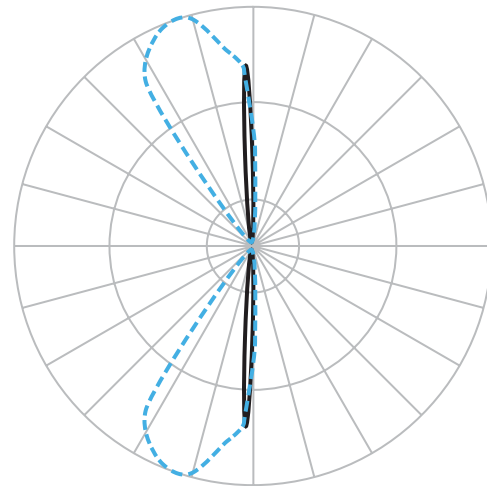

PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in ultra narrow beam precision optics. An appealing cubical profile perfect for accent lighting.

FEATURES

- High performance facade LED wall mount light
- Can be mounted upwards or downwards
- Solid aluminum construction
- 80,000 hour rated life
- 5 year warranty

ORDERING NUMBER

Distribution	Diameter	Watt	Beam	Color Temp	CRI	Lumens	CBCP	Light Direction	Finish								
Double	DC-WD	05	5"	22W	U	6°	827 2700K 85 125 x2 1182 x2	B Towards the wall	<table border="0"> <tr> <td>BK Black</td> <td></td> </tr> <tr> <td>WT White</td> <td></td> </tr> <tr> <td>BZ Bronze</td> <td></td> </tr> <tr> <td>GH Graphite</td> <td></td> </tr> </table>	BK Black		WT White		BZ Bronze		GH Graphite	
							BK Black										
							WT White										
							BZ Bronze										
GH Graphite																	
830 3000K 85 145 x2 1363 x2																	
835 3500K 85 150 x2 1411 x2																	
840 4000K 85 155 x2 1462 x2																	

DC-WD05-U ___ B-___

Example: DC-WD05-U830B-WT

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122


Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

CUBE ARCHITECTURAL DC-WS06-U

Ultra Narrow Beam LED Wall Mounts

WAC LIGHTING

Responsible Lighting®

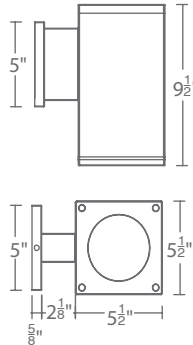

Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in ultra narrow beam precision optics. An appealing cubical profile perfect for accent lighting.

FEATURES


- High performance facade LED wall mount light
- Can be mounted upwards or downwards
- Solid aluminum construction
- 80,000 hour rated life
- 5 year warranty

SPECIFICATIONS

Input:	120V - 277VAC 50/60Hz
Dimming:	0 - 10V Dimming: 100% - 20% ELV 100% - 10% (120V only)
Standards:	IP65 rated, UL & cUL wet location listed
Operating Temp:	-40°C to 40°C

PHOTOMETRY

Reads 0.2 footcandle at 15 feet distance

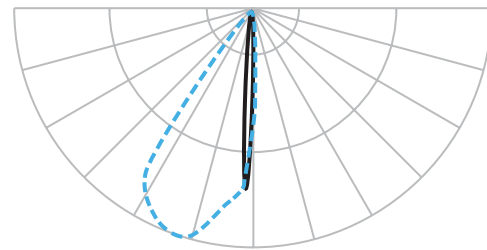

ORDERING NUMBER

Distribution	Diameter	Watt	Beam	Color Temp	CRI	Lumens	CBCP	Light Direction	Finish						
Single	DC-WS	06	6"	11W	U	6°	827	2700K	85	110	1239	B	Towards the wall		BK Black WT White BZ Bronze GH Graphite
							830	3000K	85	130	1428				
							835	3500K	85	130	1478				
							840	4000K	85	135	1532				

DC-WS06-U ___ B-___

Example: DC-WS06-U830B-WT

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122



Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

CUBE ARCHITECTURAL DC-WD06-U

Ultra Narrow Beam LED Wall Mounts

WAC LIGHTING

Responsible Lighting®

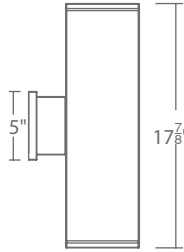

Fixture Type:

Catalog Number:

Project: _____


Location: _____

SPECIFICATIONS

Input: 120V - 277VAC 50/60Hz
Dimming: 0 - 10V Dimming: 100% - 20%
 ELV 100% - 10% (120V only)
Standards: IP65 rated, UL & cUL wet location listed
Operating Temp: -40°C to 40°C

PHOTOMETRY

Reads 0.2 footcandle at 15 feet distance

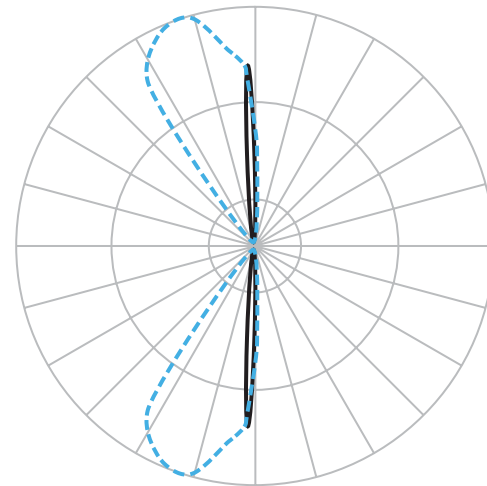


PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in ultra narrow beam precision optics. An appealing cubical profile perfect for accent lighting.

FEATURES

- High performance facade LED wall mount light
- Can be mounted upwards or downwards
- Solid aluminum construction
- 80,000 hour rated life
- 5 year warranty

ORDERING NUMBER

Distribution	Diameter	Watt	Beam	Color Temp	CRI	Lumens	CBCP	Light Direction	Finish	
Double	DC-WD	06	6"	22W	U	6°	827 2700K 85 110 x2 1239 x2	B Towards the wall		BK Black WT White BZ Bronze GH Graphite
							830 3000K 85 130 x2 1428 x2			
							835 3500K 85 130 x2 1478 x2			
							840 4000K 85 135 x2 1532 x2			

DC-WD06-U ___ B- ___

Example: DC-WD06-U830B-WT

wacighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122

Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760