


# TUBE ARCHITECTURAL DS-WS05-U

## Ultra Narrow Beam LED Wall Mounts

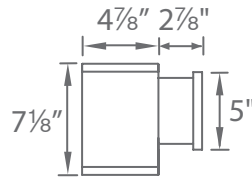

Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

### PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in ultra narrow beam precision optics. An appealing cylindrical profile perfect for accent lighting.

### FEATURES


- High performance facade LED wall mount light
- Can be mounted upwards or downwards
- Solid aluminum construction
- 80,000 hour rated life
- 5 year warranty

### SPECIFICATIONS

**Input:** 120V - 277VAC 50/60Hz  
**Dimming:** 0 - 10V Dimming: 100% - 20%  
 ELV 100% - 10% (120V only)  
**Standards:** IP65 rated, ETL & cETL wet location listed  
**Operating Temp:** -40°C to 40°C

### PHOTOMETRY

Reads 0.2 footcandle at 15 feet distance

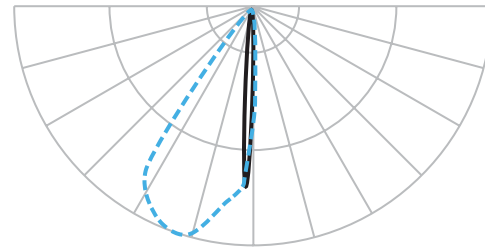

### ORDERING NUMBER

Distribution	Diameter	Watt	Beam	Color Temp	CRI	Lumens	CBCP	Light Direction	Finish					
Single	DS-WS	05	5"	11W	U	6°		B Towards the wall						
										27	2700K	85	125	1182
										30	3000K	85	145	1363
										35	3500K	85	150	1411
				40	4000K	85	155	1462						

**DS-WS05-U** \_\_\_ **B**-\_\_\_

Example: **DS-WS05-U30B-WT**

wacighting.com  
 Phone (800) 526.2588  
 Fax (800) 526.2585

Headquarters, East Manufacturing Facility  
 44 Harbor Park Drive  
 Port Washington, NY 11050


South East Manufacturing Facility  
 1600 Distribution Ct  
 Lithia Springs, GA 30122

Central Manufacturing Facility  
 1700 South J Elmer Freeway, Ste 100  
 Cedar Hill, TX 75104

West Manufacturing Facility  
 1750 S Archibald Ave  
 Ontario, CA 91761

# TUBE ARCHITECTURAL DS-WD05-U

## Ultra Narrow Beam LED Wall Mounts

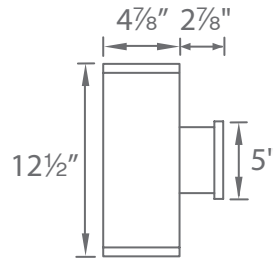

Fixture Type:

Catalog Number:

Project: \_\_\_\_\_


Location: \_\_\_\_\_

### SPECIFICATIONS

**Input:** 120V - 277VAC 50/60Hz  
**Dimming:** 0 - 10V Dimming: 100% - 20%  
 ELV 100% - 10% (120V only)  
**Standards:** IP65 rated, ETL & cETL wet location listed  
**Operating Temp:** -40°C to 40°C

### PHOTOMETRY

Reads 0.2 footcandle at 15 feet distance

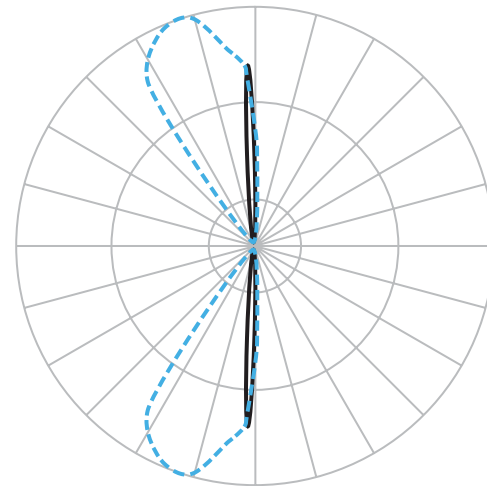


### PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in ultra narrow beam precision optics. An appealing cylindrical profile perfect for accent lighting.

### FEATURES

- High performance facade LED wall mount light
- Can be mounted upwards or downwards
- Solid aluminum construction
- 80,000 hour rated life
- 5 year warranty

### ORDERING NUMBER

Distribution	Diameter	Watt	Beam	Color Temp	CRI	Lumens	CBCP	Light Direction	Finish
Double DS-WD	05 5"	22W	U 6°	27 2700K	85	125 x2	1182 x2	B Towards the wall	 BK Black WT White BZ Bronze GH Graphite
				30 3000K	85	145 x2	1363 x2		
				35 3500K	85	150 x2	1411 x2		
				40 4000K	85	155 x2	1462 x2		


DS-WD05-U \_\_\_ B-\_\_\_

Example: DS-WD05-U30B-WT

wacighting.com	Headquarters, East Manufacturing Facility	South East Manufacturing Facility	Central Manufacturing Facility	West Manufacturing Facility
Phone (800) 526.2588	44 Harbor Park Drive	1600 Distribution Ct	1700 South J Elmer Freeway, Ste 100	1750 S Archibald Ave
Fax (800) 526.2585	Port Washington, NY 11050	Lithia Springs, GA 30122	Cedar Hill, TX 75104	Ontario, CA 91761

# TUBE ARCHITECTURAL DS-WS06-U

## Ultra Narrow Beam LED Wall Mounts

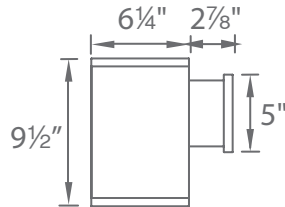

Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

### PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in ultra narrow beam precision optics. An appealing cylindrical profile perfect for accent lighting.

### FEATURES


- High performance facade LED wall mount light
- Can be mounted upwards or downwards
- Solid aluminum construction
- 80,000 hour rated life
- 5 year warranty

### SPECIFICATIONS

**Input:** 120V - 277VAC 50/60Hz  
**Dimming:** 0 - 10V Dimming: 100% - 20%  
 ELV 100% - 10% (120V only)  
**Standards:** IP65 rated, ETL & cETL wet location listed  
**Operating Temp:** -40°C to 40°C

### PHOTOMETRY

Reads 0.2 footcandle at 15 feet distance

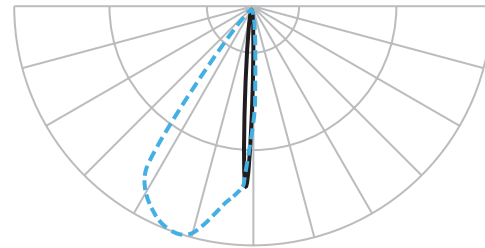

### ORDERING NUMBER

Distribution	Diameter	Watt	Beam	Color Temp	CRI	Lumens	CBCP	Light Direction	Finish					
Single	DS-WS	06	6"	11W	U	6°		B Towards the wall						
										27	2700K	85	110	1239
										30	3000K	85	130	1428
										35	3500K	85	130	1478
				40	4000K	85	135	1532						

DS-WS06-U \_\_\_ B-\_\_\_

Example: DS-WS06-U30B-WT

wacighting.com  
 Phone (800) 526.2588  
 Fax (800) 526.2585

Headquarters, East Manufacturing Facility  
 44 Harbor Park Drive  
 Port Washington, NY 11050


South East Manufacturing Facility  
 1600 Distribution Ct  
 Lithia Springs, GA 30122

Central Manufacturing Facility  
 1700 South J Elmer Freeway, Ste 100  
 Cedar Hill, TX 75104

West Manufacturing Facility  
 1750 S Archibald Ave  
 Ontario, CA 91761

# TUBE ARCHITECTURAL DS-WD06-U

## Ultra Narrow Beam LED Wall Mounts

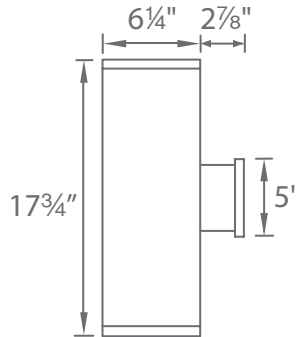

Fixture Type:

Catalog Number:

Project: \_\_\_\_\_


Location: \_\_\_\_\_

### SPECIFICATIONS

**Input:** 120V - 277VAC 50/60Hz  
**Dimming:** 0 - 10V Dimming: 100% - 20%  
 ELV 100% - 10% (120V only)  
**Standards:** IP65 rated, ETL & cETL wet location listed  
**Operating Temp:** -40°C to 40°C

### PHOTOMETRY

Reads 0.2 footcandle at 15 feet distance

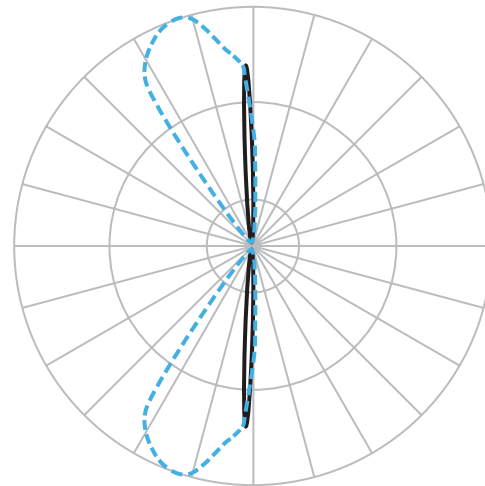


### PRODUCT DESCRIPTION

Precise engineering using the latest energy efficient LED technology with a built-in ultra narrow beam precision optics. An appealing cylindrical profile perfect for accent lighting.

### FEATURES

- High performance facade LED wall mount light
- Can be mounted upwards or downwards
- Solid aluminum construction
- 80,000 hour rated life
- 5 year warranty

### ORDERING NUMBER

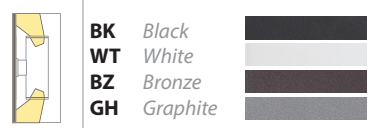Distribution	Diameter	Watt	Beam	Color Temp	CRI	Lumens	CBCP	Light Direction	Finish
Double	DS-WD	06	6"	22W	U	6°	<b>27</b> 2700K 85 110 x2 1239 x2 <b>30</b> 3000K 85 130 x2 1428 x2 <b>35</b> 3500K 85 130 x2 1478 x2 <b>40</b> 4000K 85 135 x2 1532 x2	<b>B</b> Towards the wall	

DS-WD06-U \_\_\_ B-\_\_\_

Example: DS-WD06-U30B-WT