

120/277VAC, 6 X 350MA (2-21VDC)

Dimmable Remote Power Supply

WAC



Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

FINISHES



Black

Model & Product

L x W x H

PS-0350A-UR6

10 7/8" x 3 7/8" x 1 1/4"

PRODUCT DESCRIPTION

This class 2 UL & cUL listed enclosed electronics power supply is one of the most exciting LED power supplies available. What makes this dimmable LED power supply unique is that it has 6 output terminals with time saving terminate conductors from 24-12 AWG of solid, stranded and fine-stranded conductors by pull the lever up, insert a conductor and push the lever back down. It is compatible with TRIAC/ELV phase cut or 0-10V dimmer. Additionally, it features different kinds of protection from over voltage to short circuit. It is incredibly robust and includes a 5 years warranty. It works with an input voltage of 120-277VAC so you can utilize it for many commercial applications. It features an integrated wiring compartment for a streamlined installation.

FEATURES

- Universal Input 120-277VAC
- ≥ 0.9 pf
- Overload and short circuit protection
- TRIAC/ ELV/0-10V Dimming Control
- 0-10V Dimming curve adjustment
- Class 2 Output
- 5 Year warranty

SPECIFICATIONS

Input: 24VDC

Output: 6 X 350mA, 2-21VDC

Dimming: TRIAC/ELV/0-10V: 100-1%
0-10V Minimum Current Source: 95uA
0-10V Maximum Current Sink: 150uA


Rated Life: 50,000 hours

Mounting: Can be mounted on ceiling or wall in all orientations

Operating Temp: -4°F to 104°F (-20°C to 40°C)

Standards: UL, cUL, Damp Location Listed

LINE DRAWING

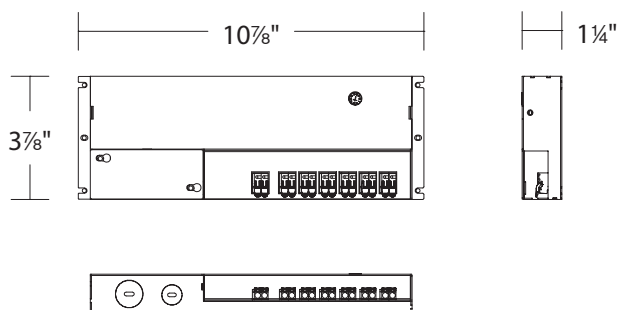

waclighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91760