
OCULARC 3.5 DIM-TO-WARM

Adjustable Pinhole - R3CRPT, R3CRPL

WAC LIGHTING

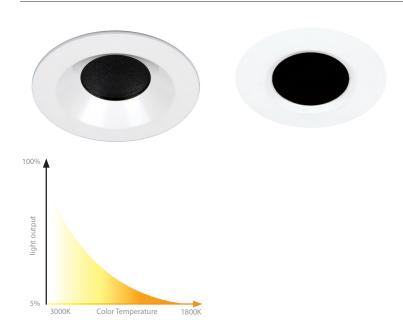

Fixture Type:	
Catalog Number	
Catalog Number:	
Project:	
Location:	

PRODUCT DESCRIPTION

The brilliant LED recessed downlight that gradually changes to a warmer color temperature as you dim. Great for new construction projects or remodels.

FEATURES

- 2 beam angle options included:
 Narrow flood beam pre-installed, interchangable flood beam film supplied
- Non IC and IC-Rated, Airtight, New Construction, Remodel
- Adjustable LED light engine included with housing:
 Vertical Adjustment 0-30°, Horizontal Adjustment 365°
- Shallow housing under 4" depth
- 5 year warranty

SPECIFICATIONS

Construction: Die-cast aluminum trim and heat sink Input Power: 13W/16W, 120V-277V 50/60Hz

Dimming: 100% - 1% TRIAC, ELV

100% - 5%, 0-10V

Light Source: CRI 95 high output COB LED rated life of 50,000 hours **Mounting:** Retention clips firmly hold trim to housing. Cutout 4 1/4"

Finish: Powder coated white.

Ceiling thickness: 1/2" - 1"

Operating Temp: $-4^{\circ}F$ to $104^{\circ}F$ ($-20^{\circ}C$ to $40^{\circ}C$)

Standards: UL & cUL, Wet Location listed, Title 24 JA8-2019 Compliant

Trims (Order Housing Separately)	Model	Power	Beam	Color Temp	Max Lumens	Мах СВСР	Finish	
43/4" ——	R3CRPT	13W	Narrow Flood 32°	3000K - 1800K	760	2115		
Rou			Flood 54°		600	660		
	Round Trim Adjustable Pinhole	16W	Narrow Flood 32°		900	2500		
⊦ 2" ₊			Flood 54°		710	780	WT	White
├── 3 3/8 ⁿ ──	R3CRPL Round Trimless Adjustable Pinhole	13W	Narrow Flood 32°		760	2115	ВК	Black
			Flood 54°		600	660		
			Narrow Flood 32°		900	2500		
<u></u> ⊢ 2"		16W	Flood 54°		710	780		


Example: R3CRPL-WT

waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 **Headquarters/Eastern Distribution Center** 44 Harbor Park Drive Port Washington, NY 11050 **Central Distribution Center** 1600 Distribution Ct Lithia Springs, GA 30122 **Western Distribution Center** 1750 Archibald Avenue Ontario, CA 91760

OCULARC 3.5 DIM TO WARM

Adjustable Pinhole - R3CRPT, R3CRPL



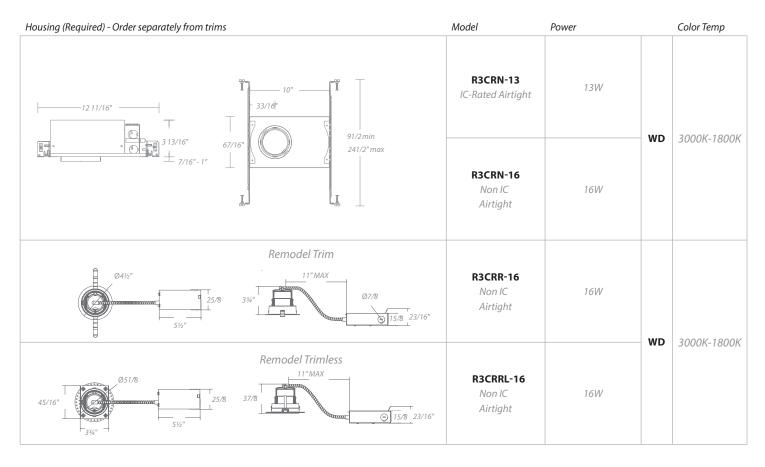

R3CR_-_--WD Example: R3CRN-13-WD