

# W.A.C LIGHTING CO.

## INSTRUCTIONS:

Line Volt Wall Sconce Models: WS-MR55H

## CAUTION:


Always turn off power at fuse box prior to installation to prevent electrical shock. For installation by a qualified electrician.

Install over a standard 4 inch junction box.

Overview: This 120 volt wall sconce is designed to accept the G515, G516, G518, & G522 series shades. Check catalog for various color choices.

### **Fixture Installation:**

- Loosen the three canopy screws and 1. separate the canopy from the base plate.
- Remove a knock out from the base plate. 2.
- Guide the black, white wires from the 3. transformer through the knock out in the base plate.
- Connect ground wire from junction box to the 4. green grounding wire from the base plate.
- Connect corresponding wires from the 5. junction box to fixture wires, with wire nuts (supplied).
- Attach the base plate to the junction box 6. using the slotted holes.
- 7. Position the canopy to the base plate, and tighten the three screws loosened earlier.

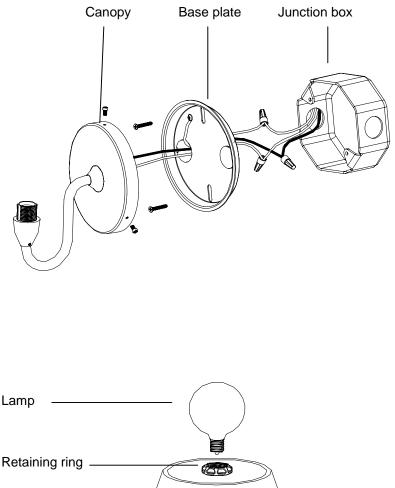

### Installing Lamp & Shade:

- 1. Position shade so that threads go through the hole in the shade and screw on the retaining ring from above.
- 2. Use a G16-1/2 lamp with a candelabra base (supplied).
- 3. Screw clockwise to install.

Retain instructions for future reference.

