


AETHER 3.5" - Downlight Trimless

R3ARDL, R3ASDL

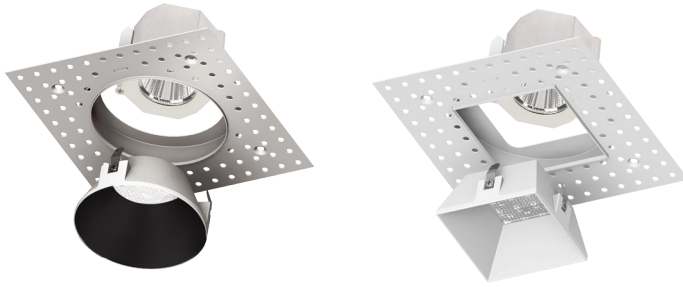

Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Aether features all of the benefits of a high performance LED recessed downlight including Energy Star® Rating, Wet Location listing, and high output with efficiency. Available in a sleek trimless option which can be spackled directly up to the aperture. At 3.5" in height, the Aether is designed with the difficult to fit jobs in mind.

FEATURES

- Designed to fit in tight plenum
- Wet location listed for trims
- 3.5" trim aperture, 3.5" housing height
- 35° cut-off angle
- 5 year WAC Lighting product warranty

SPECIFICATIONS

- Construction:** Die-cast aluminum trim with extruded aluminum heat sink
- Input:** Universal 120 - 277VAC, 50/60 Hz
- Power:** 15.5W, power factor 0.98
- Dimming:** 100% - 0% with 0-10V dimmer
100% - 5% with Electronic Low Voltage (ELV) dimmer
- Mounting:** Retention clips firmly hold trim to housing
- Ceiling thickness:** ½" - 1½"
- Finish:** Electrostatically Powder Coated White, Black, Enamel Coated Haze
- Standards:** ETL & cETL Wet Location Listed, Title 24 JA8 Compliant, Energy Star 2.0

Trim (See next page for housing)	Model	Beam	Color Temp	CRI	Lumens	CBCP	Finishes
	R3ARDL Round, Downlight Wet Location	N 25°	827 2700K 85 1130 3515	85	1175	3660	BK Black HZ Haze WT White
			835 3500K 85 1210 3740				
			840 3500K 85 1220 3810				
		F 45°	927 2700K 90 940 2930	90	980	3050	
			930 3000K 90 980 3050				
			827 2700K 85 1080 1630				
830 3000K 85 1130 1695							
835 3500K 85 1160 1745							
	R3ASDL Square, Downlight Wet Location	N 25°	840 3500K 85 1220 3810	85	1210	3740	BK Black HZ Haze WT White
			927 2700K 90 940 2930				
			930 3000K 90 980 3050				
		F 45°	827 2700K 85 1080 1630	85	1130	1695	
			830 3000K 85 1130 1695				
			835 3500K 85 1160 1745				
F 45°	840 3500K 85 1175 1765	85	1175	1765			
	927 2700K 90 900 1356						
	930 3000K 90 940 1410						

R3A_DL-_____


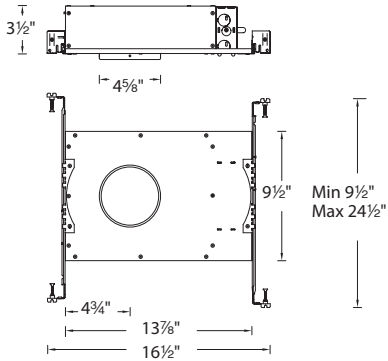
Example: **R3ARDL-N930-HZ**

AETHER 3.5" - Downlight Trimless Housing



Housing (Required)

Model

 	HR-3LED-H17A	New Construction IC-rated, Airtight
	HR-3LED-H17AC	New Construction IC-rated, Airtight Chicago Plenum

HR-3LED-H17 _____

Example: **HR-3LED-H17A**

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters, East Manufacturing Facility

44 Harbor Park Drive

Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct

Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway, Ste 100

Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave

Ontario, CA 91761